

P23/C13 LED TUBE LIGHT

TYPE

LED Fluorescent shape fitting.

CONSTRUCTION


- Polycarbonate housing.
- Defrosted lid.
- Low profile polycarbonate captive clips.
- LED tubes included.

EX LAMP TYPE

- Bi-pin T8 LED tubes.
- 5000K Samsung LED's.
- 120 degrees symmetrical beam.
- Isolated Electronic driver

STANDARD LAMP TYPE

- Bi-pin T5 LED tubes.
- 6000K Samsung LED's.
- 120 degrees symmetrical beam.

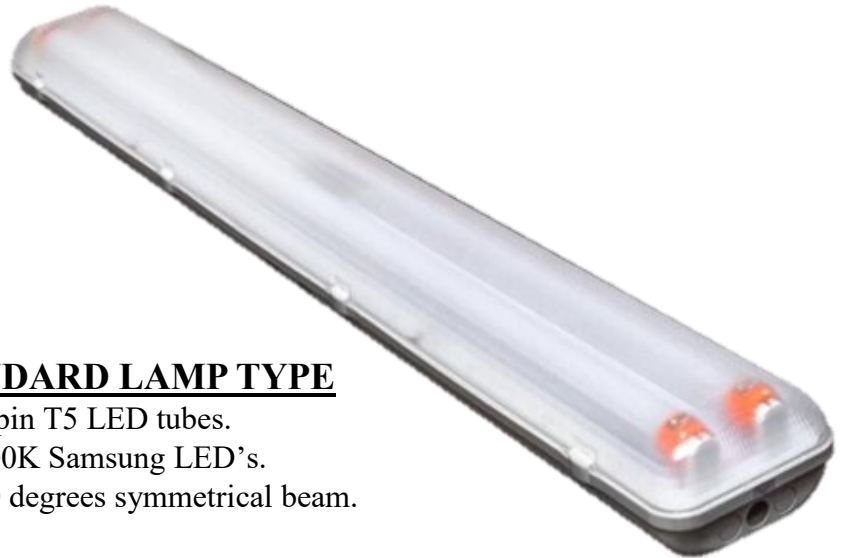

MOUNTING

- Two stainless steel mounting brackets that clip onto the back of the polycarbonate housing.
- Additional stainless steel hanging clips for catenary cable hanging.

SPECIAL EX FEATURES

- The lamps are wired up with two Live pins and two Neutral pins in parallel to minimize loss of connectivity even under vibration. (On request fittings can be wired with Live and Neutral on the same side)
- EN 61000-3-2 (Harmonic Distortion).
- IEC 61347-2-13 (safety requirements for electronic control gear)
- Isolated Electronic driver.

ELECTRICAL SPECIFICATIONS

- Input voltage is 100 - 277VAC, 50/60Hz.
- PFC > 0.95
- 4 Foot tube: 2 x 18.4W
- 5 Foot tube: 2 x 22W
-

CERTIFICATION

- Ex nA IIC T5 Gc
- Ex tb IIIC T85°C Db IP65
- IA No: MASC S/22-2367X

ORDER INFORMATION

PART NUMBER	DESCRIPTION	MAT. NUMBER
AMP23-420	4ft EX fitting c/w LED tubes	
AMC13-420	4ft Standard fitting c/w LED tubes	
AMC13-520	5ft standard fitting c/w LED tubes	
SMDIT-EF1004	4ft Ex LED tube	
SMDIT-EL1004	4ft standard LED tube	
SMDIT-EL1005	5ft standard LED tube	



PLEASE NOTE:
DUE TO TECHNICAL VARIANCES AND CHANGING TECHNOLOGY DETAILS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Electroflame (PTY) LTD
Design | Manufacture | Supply
Ex Equipment

