


COMET LIGHT - 2FT & 4FT - DATA SHEET

Doc No: DB-COM-020
REV: 2025-07-16

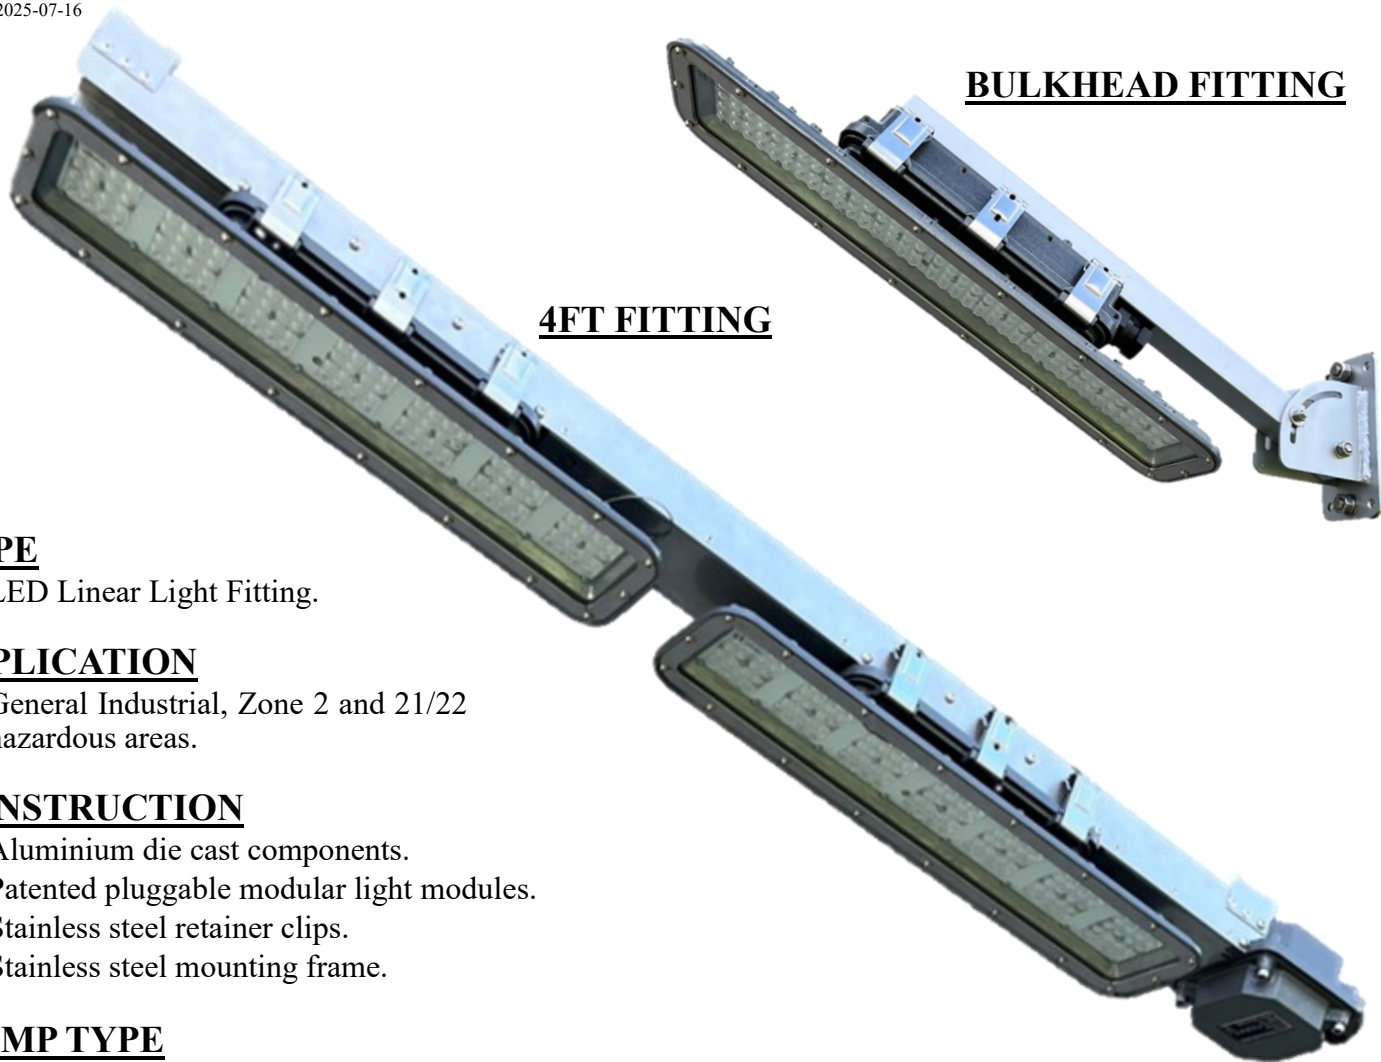

TYPE

- LED Linear Light Fitting.

APPLICATION

- General Industrial, Zone 2 and 21/22 hazardous areas.

CONSTRUCTION

- Aluminium die cast components.
- Patented pluggable modular light modules.
- Stainless steel retainer clips.
- Stainless steel mounting frame.

LAMP TYPE

- 144 LED's with 12 parallel strings for maximum LED failure redundancy.
- Colour 5000K. (4000k or 6000K available on requested)
- 120 Degree or optional 90 Degree lenses, symmetrical light beams. (Other optics available on request)

MOUNTING

- 2FT - 2 x M8 Stainless steel nuts spaced at 470mm apart.
- 4FT - 2 x M8 Stainless steel nuts spaced at 1100mm apart.
- (other mounting brackets available on request)

ELECTRICAL SPECIFICATIONS

- Input voltage: 220-240VAC + - 10%, 50/60Hz. PFC > 0.96
- Supply wattage: Internal switch selectable 27, 32, 39 or 42W per light module.

ORDER INFORMATION

| <u>PART NUMBER</u> | <u>DESCRIPTION</u> |
|--------------------|--|
| AMCOM-A10-2 | 2FT, 120 Degree symmetrical beam. |
| AMCOM-A20-2 | 2FT, 90 Degree symmetrical beam. |
| AMCOM-A53-2 | 4FT, 120 Degree symmetrical beam. |
| AMCOM-A63-2 | 4FT, 90 Degree symmetrical beam. |
| SMCOM-001 | Replacement pluggable Light Module, 120 Degree symmetrical beam. |
| SMCOM-002 | Replacement pluggable Light Module, 90 Degree symmetrical beam. |

PLEASE NOTE:
DUE TO TECHNICAL VARIANCES AND CHANGING TECHNOLOGY DETAILS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Electroflame (PTY) LTD
Design | Manufacture | Supply
Ex Equipment

