

SATURN TROLLEYLITE DATA SHEET

TYPE

Moveable LED FloodLight.

APPLICATION

Temporary lighting in Zone 2 and 21/22 hazardous areas.

CONSTRUCTION

- Aluminium LM24 die cast housing.
- Mild steel frame with wheels and swing arm.

LAMP TYPE

- 64 Osram Oslon Square LED's with bypass redundancy Zerner Diodes.
- Colour 5000K.
- 64 Degree symmetrical beam. (Other optics available on request)

SPECIAL FEATURES

- 20 Meter supply cable with CEAG plant plug.
- Swing down arm for easy transportability and storage.

ELECTRICAL SPECIFICATIONS

- Input voltage is 220-240VAC, 50/60Hz.
- PFC > 0.96 Supply wattage: 210W.

CERTIFICATION

- Ex nR IIC T6 Gc Ex tc IIIC T85°C Db IP65
- IA No: MASC S/17-0249X

PHOTOMETRIC DATA

- Total flux: 24790 lm
- Photometric test report and IES files available on request.


ORDER INFORMATION

PART NUMBER

MATERIAL NUMBER

AMSAT-200-TR63

(This unit is the upgraded AMSPE-402)

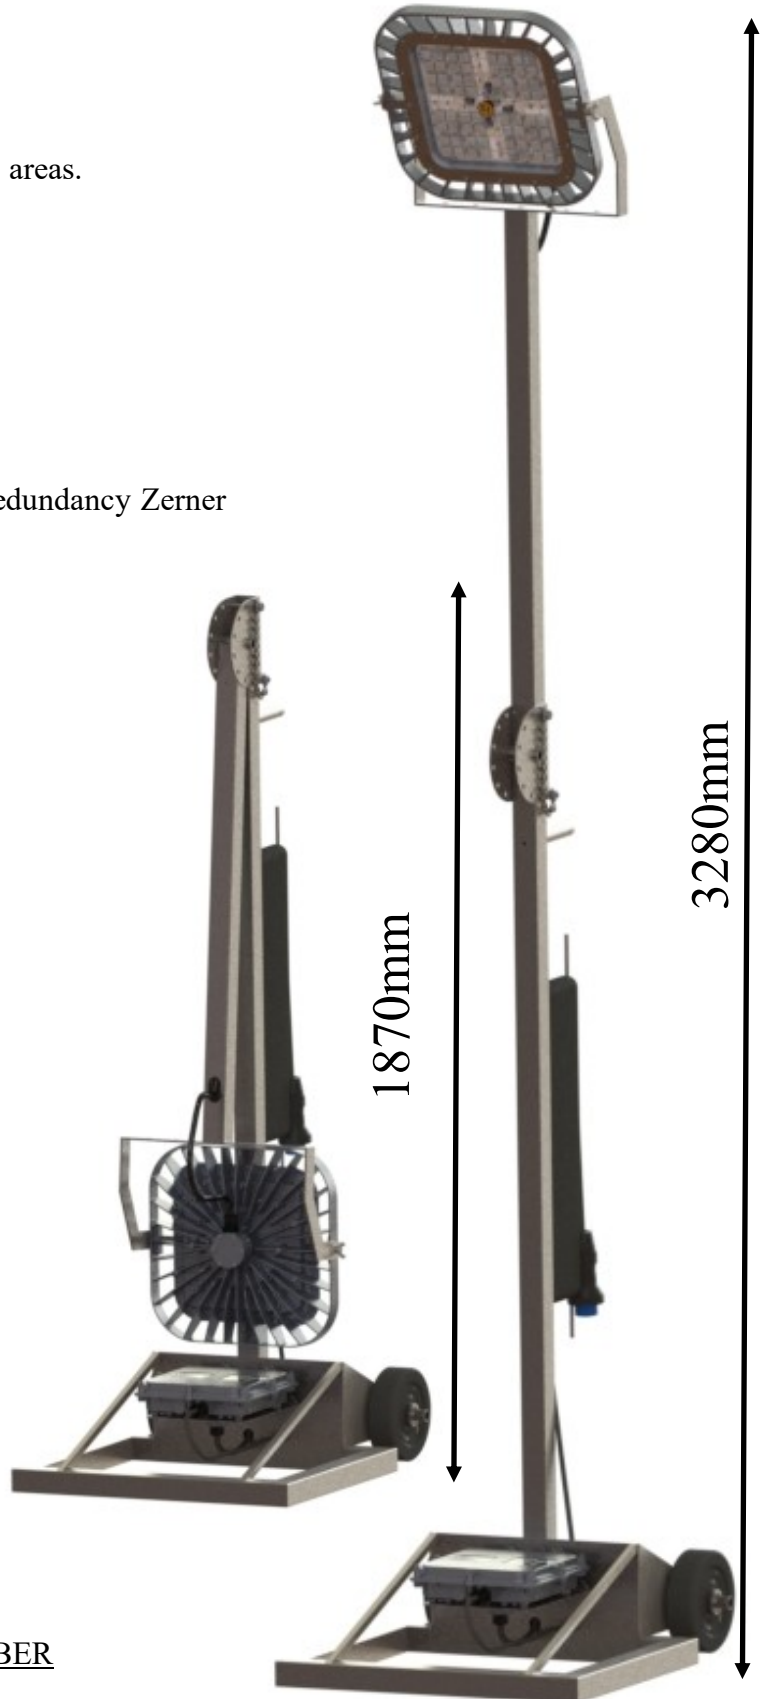

PLEASE NOTE:
DUE TO TECHNICAL VARIANCES AND CHANGING TECHNOLOGY DETAILS ARE
SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Electroflame (PTY) LTD

Design | Manufacture | Supply
Ex Equipment

