

LIMIT SWITCH

APPLICATION

The Limit Switch is suitable for surface Zone 1, 2, 21/22 areas.

CONSTRUCTION

The unit consists of a housing, head piece and activation lever. Attached to the main housing is an Exe plastic gland and a 5 meter braided cable.



Inside the housing is an Exd limit switch. The limit switch has one normally open and one normally closed contact.

The unit makes use of the Telemecanique range of heads and levers.

The adjustable roller (Y43) and fixed roller levers (Y13) are two standard units generally kept in stock.

Other heads/lever can be supplied on request.

ORDER INFORMATION

LEVER/HEAD

1. ZKC-E05 HEAD WITH ZCK-Y43 ADJUSTABLE LEVER
2. ZCK-E619 SHAFT HEAD
3. ZKC-E05 HEAD WITH ZCK-Y13 ROLLER LEVER
4. ZCK-E66 ROLLER BALL SHAFT HEAD
5. ZCK-E06 CAT WISKER HEAD
6. ZCK-E23 ROLLER LEVER PLUNGER HEAD
7. ZCK-E62 PLUNGER WITH WHEEL HEAD
8. ZCK-E61 HEAD
9. ZCK-E08 SPRING ROD LEVER HEAD

P/N

- AMLSW-001
- AMLSW-002
- AMLSW-003
- AMLSW-004
- AMLSW-005
- AMLSW-006
- AMLSW-007
- AMLSW-008
- AMLSW-010

ELECTRICAL SPECIFICATIONS

250VAC	5A
400VAC	2A
250VDC	0.5A

CERTIFICATION

Ex eb IIC T6 Gb


Ex tb IIIC T85° Db IP65

IA Number: MASC S/22-2209X

Electroflame (PTY) LTD

Design | Manufacture | Supply
Ex Equipment



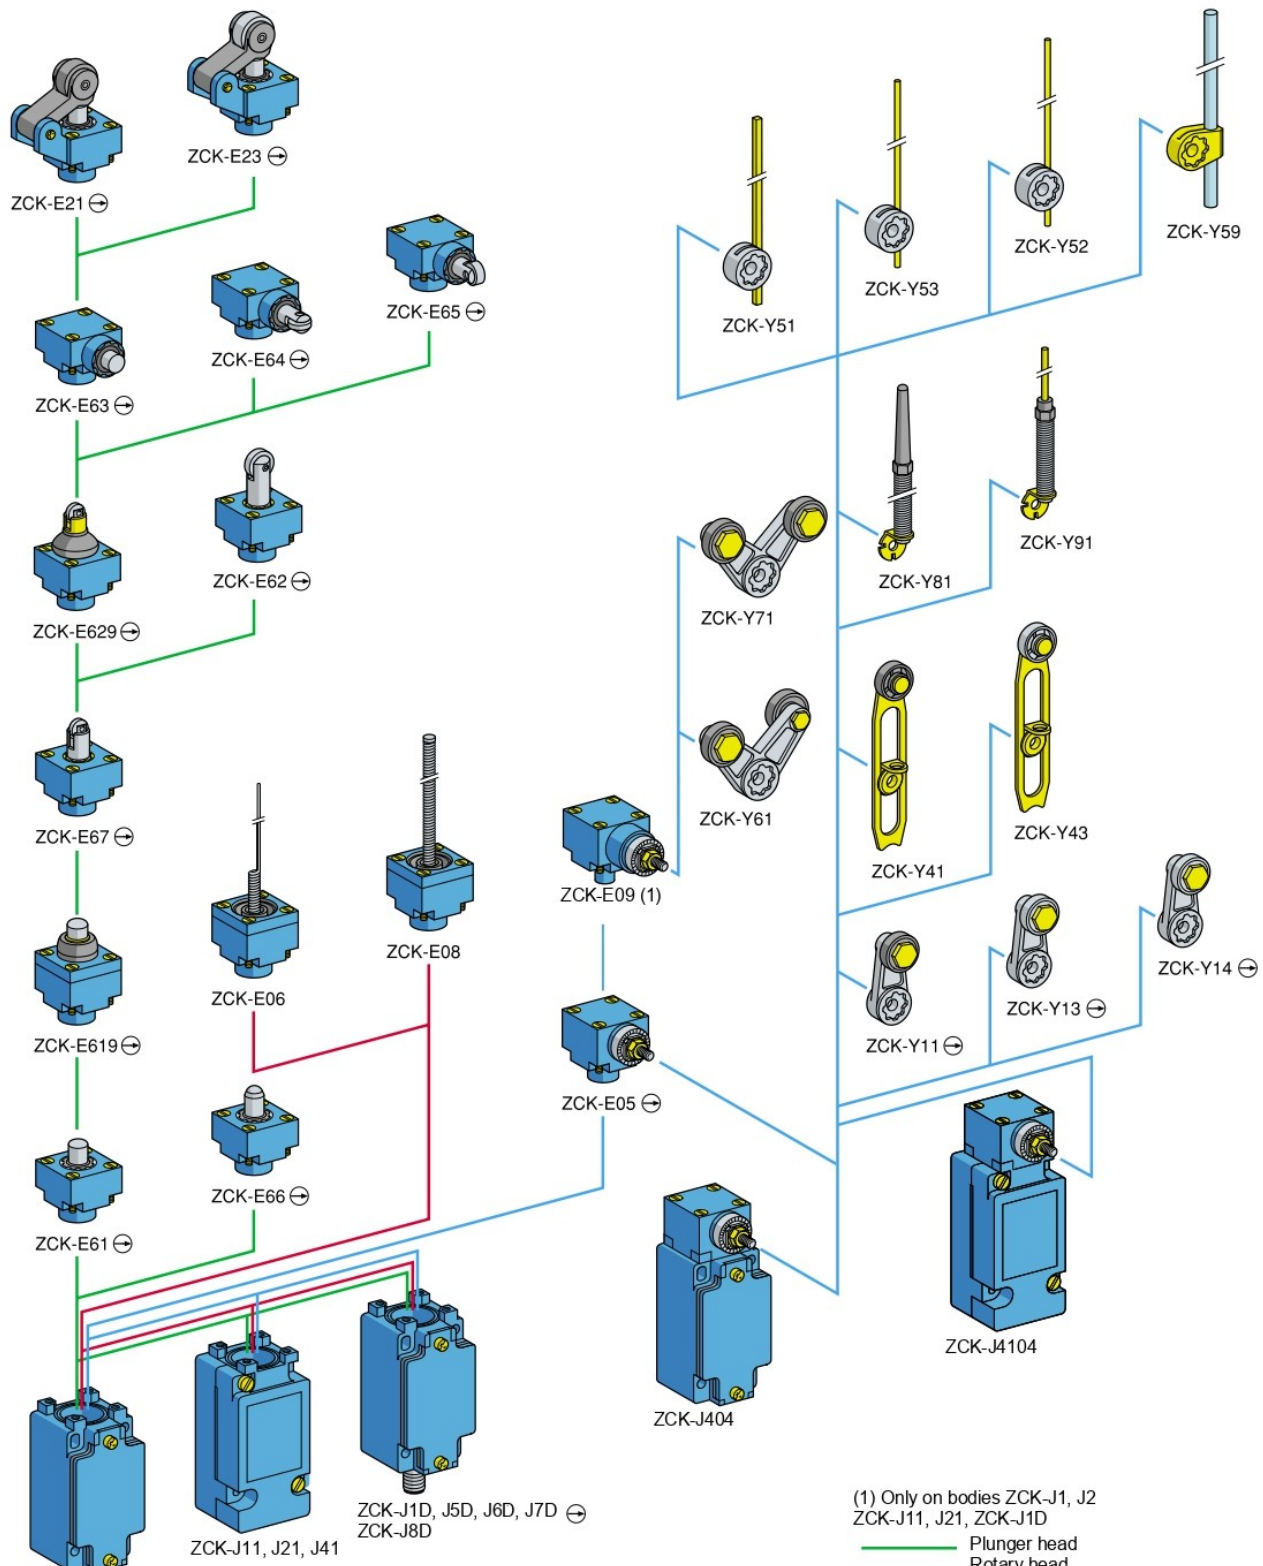

ZCK-J1, J5, J6, J7, J9 ⊖
ZCK-J2, J4, J8

ZCK-J11, J21, J41
ZCK-J1D, J5D, J6D, J7D ⊖
ZCK-J8D

ZCK-J404

ZCK-J4104

(1) Only on bodies ZCK-J1, J2
ZCK-J11, J21, ZCK-J1D

- Plunger head
- Rotary head
- Multi-directional head
- ⊖ Positive opening operation

ELECTROFLAME USES THE ZCK-J1 BODY